

AHHA TESTING LABORATORY
A DIVISION OF
AUSTRALIAN HOME HEATING ASSOCIATION INC.
ABN 13 156 892 844



8/26 Stirling Street, Thebarton, South Australia 5031
Tel: (08) 8351 8056 Fax: (08) 8351 9099
Email: testlab@homeheat.com.au

A sponsor of



**AS/NZS 2918:2001 Appendix B
CONFORMANCE CERTIFICATE**

Client: Stove Builders International Inc. **Reference Report No:** ATL15-09
Client Ref: Request – Mr M Cantin **Date:** 21/10/2009
Appliance: 'Osburn 2400' freestanding wood heater
Test Fuel: Wood Only
Floor Protector: Tested with 6mm thick sheet of fibre-cement with a thermal conductivity of 0.23 W/m.K underneath heater and extending 500mm in front and 200mm from the sides of the firebox door opening. *
Flue System: 'Flo-Met Universal Flue System' (kit – GDFLU093) which includes solid back decorative outer casing.

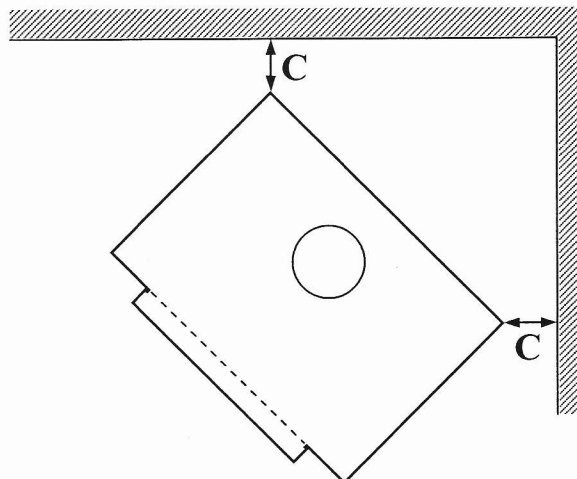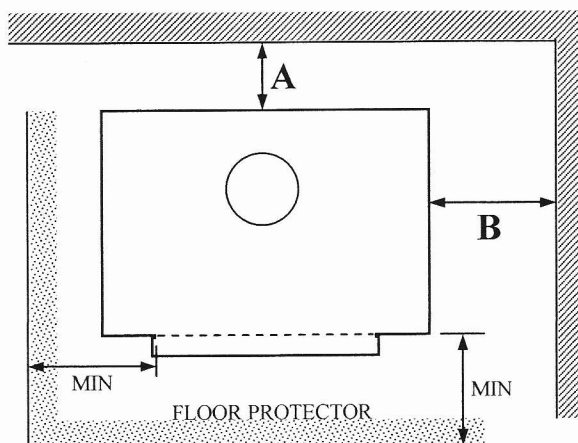

FLUE HEAT SHIELD CONFIGURATION	A (mm)	B (mm)	C (mm)
Full length stainless steel flue system with a double case for installation beyond the ceiling penetration. The flue system also incorporates a solid backed perforated decorative outer casing for reduced clearances within a room. [Test configuration 1 & 2]*	300	400	330

**Refer to referenced test report for details of tested configuration.*

Demi Brown
General Manager

Michael Gilbert
Laboratory Manager